Measured on 10/10/00

Photoinjector performance

Charge (nC) vs. laser to RF nominal phase (degrees with arbitrary zero point):

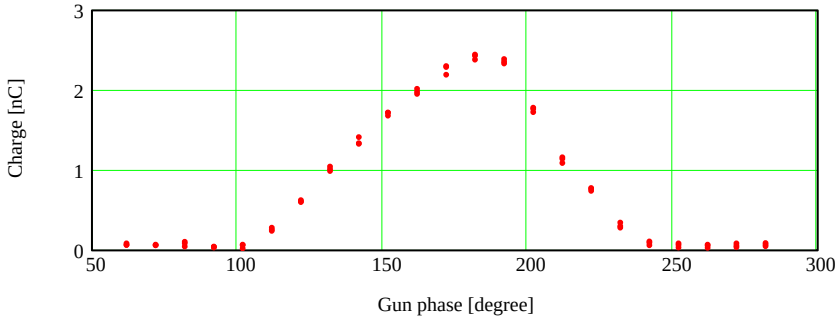

Laser energy (microJoules) vs. laser cross polarizer (step number, arbitrary units):

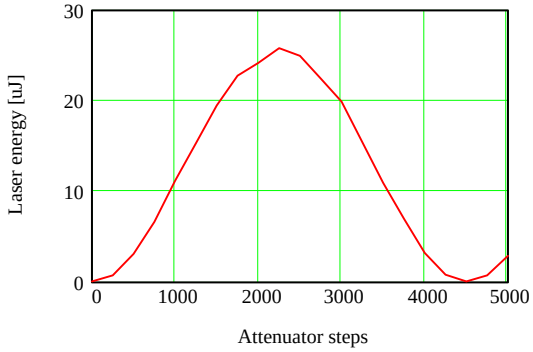

Electron charge (nC) vs. Laser energy on the cathode (microJoules):

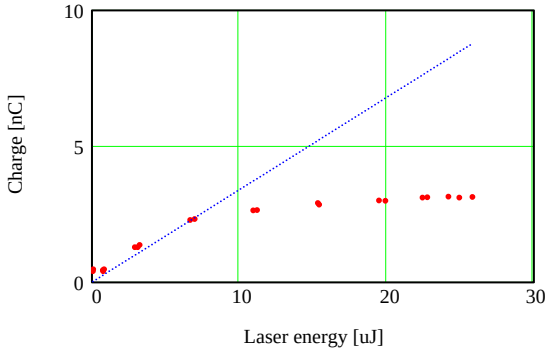

Derived quantities:

Maximum available laser energy [microJoules]:	MaxLaserEnergy = 25.588
Space-charge limited laser energy [microJoules]:	NomLaserEnergy = 7.494
Quantum efficiency [nC/microJoule]:	QuantumEfficency = 0.34
Quantum efficiency [percent]:	0.466 QuantumEfficency = 0.158
Maximum (space-charge limitted laser energy) charge [nC]:	MaxCharge = 2.445
measured at a laser energy of:	LaserEnergyMean = 7.688
and at a nominal gun phase of:	MaxGunPhase = 181.994

Statistics:

Laser energy standard deviation [%]	LaserEnergyStdDev = 3.704
Peak to Peak laser energy jitter [%]:	LaserEnergyPeak2Peak = 18.41

Operating point:

Nominal charge [nC]:	NomCharge = 0.623
@ Gun Phase [deg]:	NomGunPhase = 121.994
Gun Forward Power [Volts]:	GunFrwdPower = - 1.118